

[SELECT]

- Enter sub modes
- >2 sec. = enter setup
- Setup: move

[MODE]

- TIME → ALTI →
- BARO → COMP →
- Return to main mode
- Accept and exit setup
- >2 sec. = light

**[-BUTTON]**

- Quick view of logbook (Altimax, S-Lander)
- Quick view of compass (Vector, X-Lander)
- Setup: Decrease (-)
- Scroll logbook & memory information

[+BUTTON]


- In TIME mode Date → Seconds
- Start / Stop
- Setup: Increase (+)
- Scroll logbook & memory information

SUUNTO

ALTIMAX, S-LANDER, VECTOR, X-LANDER

POCKET GUIDE


SUUNTOwww.suunto.com

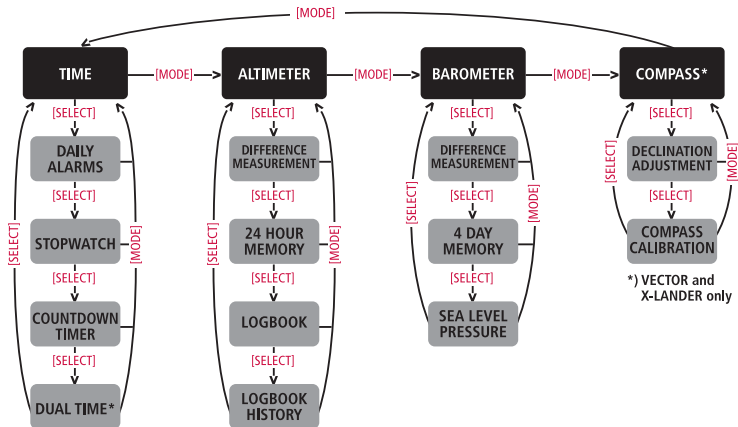

*) VECTOR and X-LANDER only

*) ALTIMAX and S-LANDER only

HOW TO DO

SET REFERENCE ALTITUDE

① Mode = ALTI ② [SELECT] > 2sec. ③ [-] or [+] to change ④ [MODE] to return

CALIBRATE COMPASS ① Mode = COMP ② 2 x [SELECT] ③ [SELECT] > 2sec. ④ [-] ⑤ hold level, rotate 360° ⑥ repeat 4 and 5 if text PUSH – is displayed until text dOnE emerges ⑦ 2 x [MODE] to return

START / STOP LOGBOOK ① Mode = ALTI ② 2 x [+] (Altimax, S-Lander)